This drawing and the information contained thereon remain the property of BeaconMedæs and may not be used for other than the purpose for which it is loaned without the expressed written permission from BeaconMedæs Engineering.

NOTES:

1. ALL ACCESSORIES, PIPE, AND FITTINGS BEYOND INLET AND DISCHARGE PORTS ARE ORDERED SEPERATELY AND INSTALLED BY OTHERS.
2. ALL PIPING SHALL BE INSTALLED IN ACCORDANCE WITH NFPA 99. PIPING LAYOUT IS DIAGRAMMATIC ONLY. FINAL ARRANGEMENT WILL BE SITE SPECIFIC. CONTRACTOR WILL BE RESPONSIBLE FOR FIELD VERIFICATION AND COORDINATING ACTUAL LOCATION WITH ALL OTHER TRADES.
3. EQUIPMENT, INSTALLATION, AND TESTING OF THE MEDICAL VACUUM FILTER MODULES SHALL COMPLY WITH NFPA 99 AND ALL STATE AND LOCAL CODES OR ORDINANCES.
4. ALLOW 24" CLEARANCE AROUND ALL SIDES FOR RECOMMENDED MAINTENANCE ACCESS.
5. NORMAL OPERATING CONDITIONS ARE WITHIN AN ALLOWABLE TEMPERATURE VARIANCE OF 35˚ TO 105˚F. (FOR HIGHER AMBIENTS, CONSULT FACTORY).

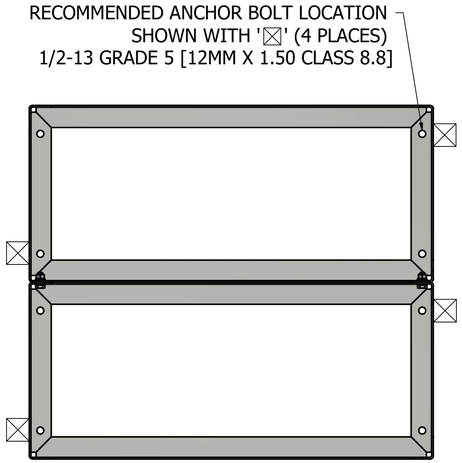

SECTION A-A
SCALE 1 / 6

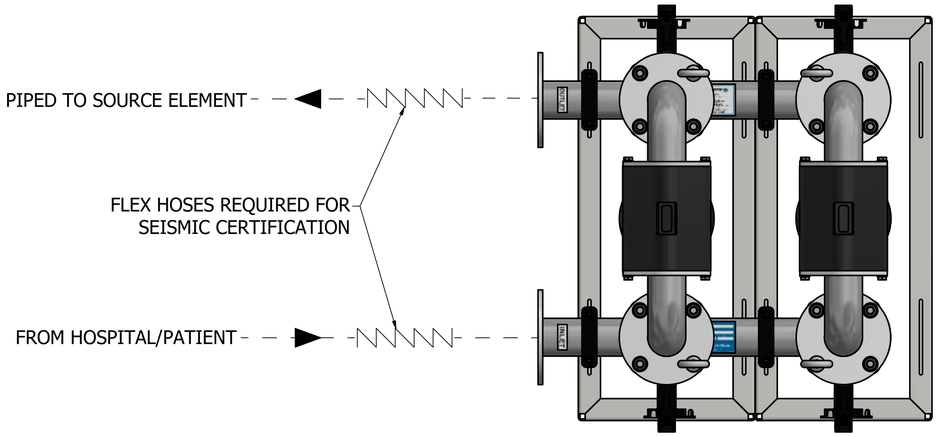

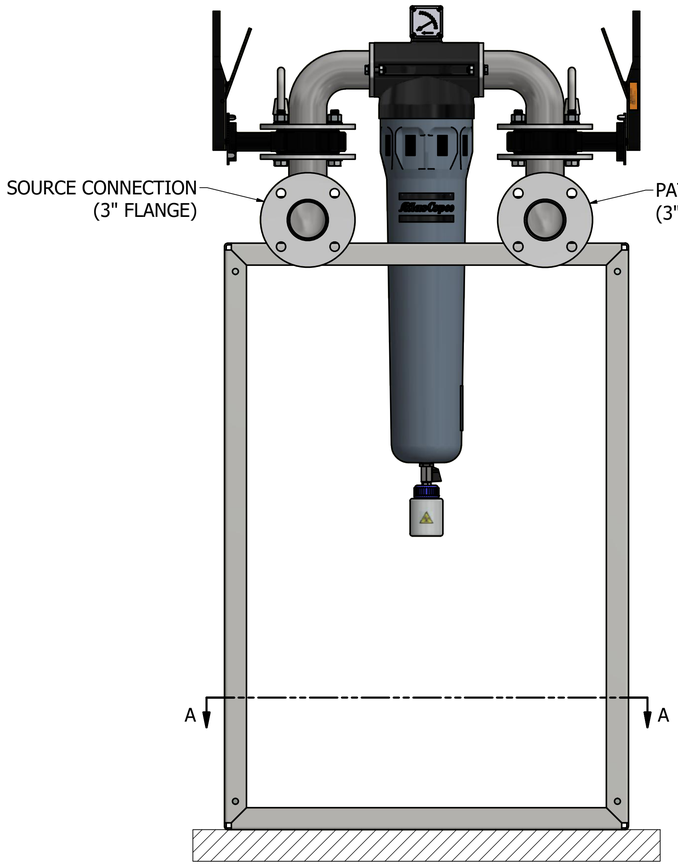

NO FOUNDATION OR INERTIA PAD IS REQUIRED
(HOUSEKEEPING PAD IS OPTIONAL)

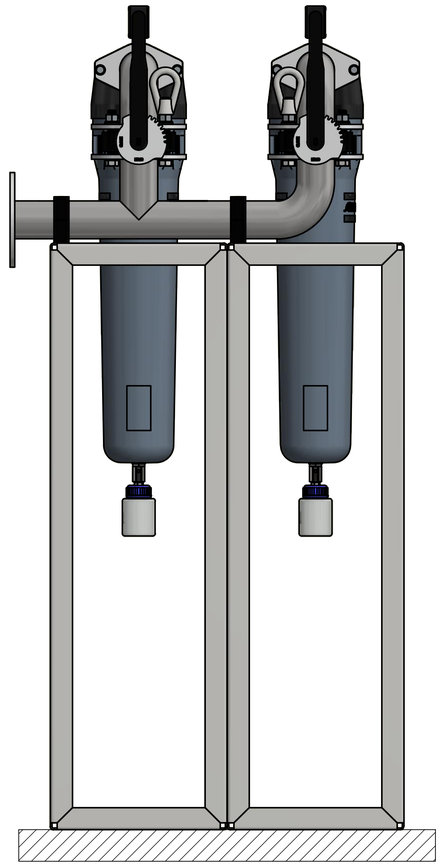

Revised:	Date:	Drawn: SMB	Date: 6/4/2018
BeaconMedæs	This drawing and the information contained thereon remain the property of BeaconMedæs and may not be used for other than the purpose for which it is loaned without the expressed written permission from BeaconMedæs Engineering.		Scale: 1 / 6
			D
Description: INSTALLATION DIAGRAM VACUUM FILTER MV160-2 90 SCFM 3" CONN		Drawing Number: 4107 8565 74	
		DN: HOP180504	Rev: 00
		Sheet 1 of 1	DO NOT SCALE THIS DOCUMENT